

# **Interfacing the Yaesu DR-1X**



**With**

**The S-Com 7330 Repeater Controller**

**For a Feature-Rich**

**Digital and Analog Experience!**

**A Technical Writing by**

**Justin Reed, NV8Q**

**Version 2**

**May 26, 2015**

## Introduction

As you might already be aware (and the reason for you reading this), the DR-1X was designed to use its internal controller to handle all of the repeat functions while giving you the ability to use a simple DTMF-driven logic box to enable you to remotely enable or disable the repeater. Thankfully, the amateur community has been busily hacking away with great progress in making these repeaters play well with external controllers. However, things get more complex when you would like to utilize the digital voice/data and AMS functions that are the centerpiece of Yaesu System Fusion. The problem is that the repeater cannot process external PTT, remote control, or AMS/FM mode changes simultaneously. It also cannot process an analog call from a controller while in AMS mode. Any of these events will lock the repeater up and require a trip to the repeater site to reset the power. The problem is pervasive to the extent that one controller manufacturer designed and produced an external logic board to intercept and apply these external signals with the proper timing. A couple of drawbacks to this approach is that it doesn't allow flexibility for things like remotely disabling digital mode during Skywarn nets, for example, or for making quick adjustments if Yaesu issues a firmware update that requires a different application of signals.

Luckily, as a 7330 owner, you have a controller flexible enough to apply the necessary signaling as long as you wire everything up correctly and load the supplied script kit found on page seven. This method gives you the ability to lock into analog mode based on a schedule, or any other application you can dream up. In fact, there are many features that can be modified, added, or removed. Some of these features are listed on the next page.

Before we get started one additional thing I'd like to mention is that the DR-1X, from the factory, has a very tightly aligned squelch. When set at the lowest usable setting, the squelch abruptly cuts off near the 20 dB quieting level, which means that you'll not be able to hear mobile stations in analog mode near the fringe of the repeater. It is possible to re-align the squelch to allow weaker signals to pass, but that is beyond the scope of this document. Luckily, you can add your own (better) squelch circuit. Using a good external squelch will increase your receiver coverage area by about 15-20%. (Note: It does not appear to me that the internal squelch setting affects the processing of digital signals in any way, as long as you set the squelch to the first notch above minimum (wide open). The add-on squelch will apply only to analog signals that are processed by your 7330).

When you have completed the hardware wiring and applied the Script Kit to your own program, you will have a DR-1X repeater that works locally in digital mode, can be linked in an analog system in FM mode, and has amazing receiver capabilities!

**Feel free to share the URL to this document but please do not host this document. I make updates occasionally and want to avoid stale information on other servers.**

### Features Included In the 7330 Script Kit:

- \*Defines three operating modes: Idle (AMS or Analog), Digital, and Analog Hold.
- Sets AMS mode while Idle, \*unless AMS mode is disabled by a control operator.
- Locks the 7330 PTT until an analog call or ID message is detected and there is currently no digital call in progress.
- Upon originating an analog call, delays the external PTT 90 milliseconds until FM analog mode is selected.
- \*During an analog call, or immediately after an analog ID/message, the 7330 holds analog mode active for five seconds after the transmitter drops. This speeds the transmitter response time during a conversation (bypasses the above-mentioned PTT delay). This Analog Hold timer is user-selectable.
- \*Analog call late entry. At the end of a digital call, if there is ongoing analog traffic coming in via another 7330 port you will join that conversation in progress.
- Digital call late entry. At the expiration of the analog mode timer, the remainder of an in-progress digital transmission will be repeated normally.
- \*Uses Logic Output 8 as a digital call indicator LED. (Can be removed).
- \*Provides a Transmitter PTT Master Disable/Enable function, which also prevents transmitting in digital mode.
- \*AMS Master Disable (Forces analog full-time).
- Allows you to link with any or all of the other two ports with no mode conflicts.
- \*Provisioned for an external relay on Logic Output 2 to remotely reset the DR-1X if needed. If your DR-1X is on a mountain top, you need this.
- \*PTT Watchdog - in the (rare) event that the DR-1X gets stuck in TX while you are away, the 7330 will power cycle the DR-1X (requires relay on the power input).

\* Indicates features available exclusively to the 7330 using this script.

### There are two parts of the install:

- The Interface Wiring.
- The 7330 Program Script to handle mixed-mode call processing.

### Items you will need:

- DR-1X Repeater
- S-Com 7330 Controller
- [Masters Communications SC-50 CTCSS decoder/Micor Squelch Board](#) (\$100)
- Soldering equipment and skill
- Duplexer, rack space, tower location, all of that jazz ;)
- The script kit at [http://ks0lnk.net/documents/DR1X\\_script\\_kit.txt](http://ks0lnk.net/documents/DR1X_script_kit.txt)

**Optional (but highly recommended) Items:**

- Yaesu cable part number T9101626 (to replace the one you cut into)
- A 12V DC relay capable of 20+ amps with a flyback diode across the coil

The SC-50 will be used to supply the 7330 with CTCSS decode logic that is independent of valid digital signals. This is required because Pin 3 on the DR-1X goes active if there is valid CTCSS/DCS/Digital activity. We need a way to distinguish between analog and digital signals, and in FM mode CTCSS is the only thing we care about, and the SC-50 provides that logic for us.

*Note: If you want to use DCS, you'll need to follow the same advice pertaining to the DR-1X's DCS setting (use an odd code nobody knows about) and instead of using an SC-50, obtain and use a DCS-23 and MS-25 squelch board and follow the wiring diagram on page 10.*

This document details how to install the SC-50 due to its superior CTCSS filtering and anti-falsing characteristics and the built-in Motorola Micor squelch chip, which is the best squelch circuit ever designed. Other vendors such as RLC, CAT, and NHRC have their own squelch boards but the SC-50 is the only product that has squelch and CTCSS decoding on a single board. This simplifies wiring and installation.

One other important advantage to using an outboard squelch is that if you need to remotely reset the DR-1X using a relay on the power input, you can do so because the DR-1X continues to output discriminator audio even while it's locked up, which means the audio, COR and CTCSS signals reach the 7330. If your 7330 has links or repeaters on the other ports, you can issue the reset command from those ports as well.

Note: I do not recommend using the Communication Specialists TS-32 or TS-64 CTCSS decoders due to inadequate high-pass filtering of higher CTCSS tones. This is causing CTCSS decoding issues on some users FTM-400 and FT-1D radios, and possibly others. The SC-50 has been tested in this configuration and does not exhibit this behavior.

**SC-50 Wiring and Configuration**


The SC-50 needs to be wired between the DR-1X and the S-Com 7330 as shown on the diagram on the following page.

There are two shunt jumpers on the SC-50. You should place the shunts on SJ1 and SJ4 positions. Rev. 4 of the board (shipped after 1/1/2016) has SJ5 which should be left in, which eliminates the need to jump pins 2 and 3 on the SC-50's DB-25 connector.

Set the dip switches to select your desired CTCSS decode tone.

See: <http://masterscommunications.com/products/squelch/txt/DIP.txt>

The SC-50 is available with or without the female DB25 connector. You can use less space inside the DR-1X by ordering one without the connector.

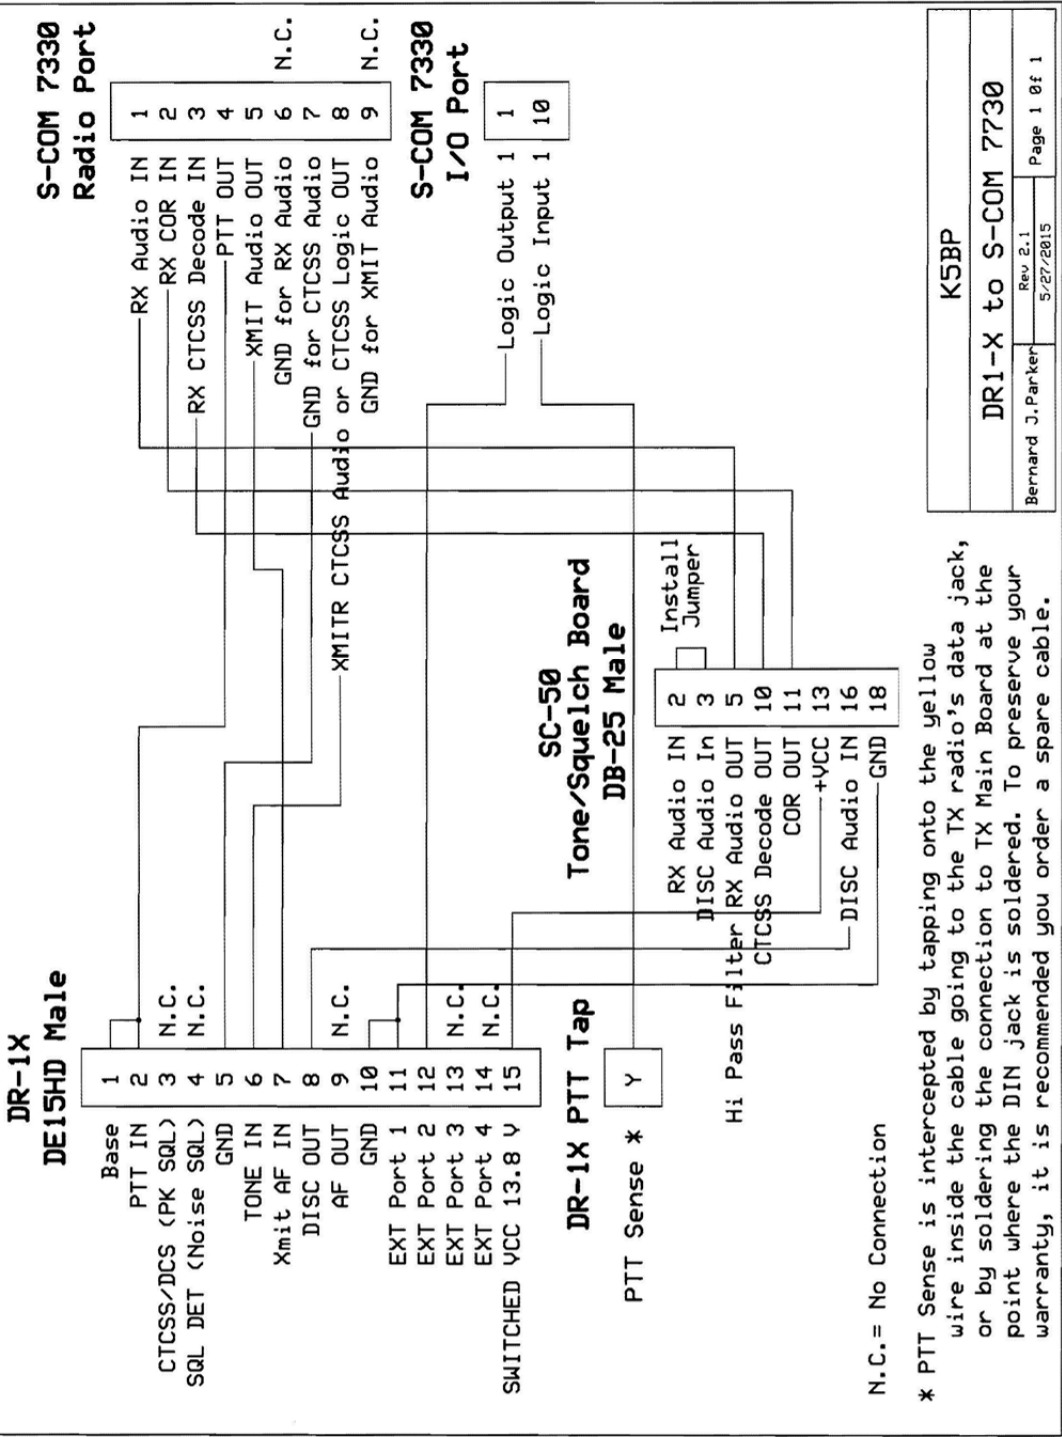

## About the PTT Sense wire: What is it?

PTT Sense is DR-1X's internal PTT line, which connects between the front USB-like plug on the front of the receive radio and the DIN plug on the rear of the transmit radio. This signal is carried on the yellow wire within that cable. The Internal PTT goes low when active. You need to tap this signal so it can trigger an event macro when this line goes low to check to see if the 7330 generated this PTT or not, and this is how we determine whether the call is digital or analog.

There are two ways you can tap into the Internal PTT. You can either carefully open the cable's jacket and shielding and scrape enough insulation off the yellow wire to tack solder a wire to it, or you can remove the transmit radio, open it up, and tack solder a wire directly to the DIN connector pin where it is soldered to the main board of the radio. Both of these methods violate your warranty, but if you are careful enough soldering to the main board, you should be able to remove the wire (and the evidence) should you need to send the unit in for repair. You can also call Yaesu USA parts and order part number T9101626 if you need a spare un-modified cable.

## DR-1X Configuration and Setup

Reference the DR-1X Operating Manual to configure the following parameters.

- Input your callsign.
- Carefully input your uplink frequency (the frequency the repeater receives) and the downlink frequency (the frequency the repeater transmits on).
- Set Remote mode ON.
- Set the DCS Receive tone ON and the Transmit tone OFF.
- In the Signaling menu, select a DCS code that is NOT likely to be used. It is critical that this code be kept secret and never used.
- You can set any DSQ Code you like, but to make it easier on travelers I recommend leaving it OFF unless you have co-channel interference from another Fusion repeater. (Note: The DSQ code is not a DCS/DPL code. It is used in digital mode only.)
- Enable 1200 baud packet mode. Most DR-1X's come from the factory set to 9600 baud. The external transmit audio path bypasses the pre-emphasis stage in 9600 baud mode, so unless you plan on adding your own pre-emphasis you will want to use 1200 baud or else your transmit audio will sound muddy.

## SC-50 Squelch

Setting this squelch is simple. With the DR-1X powered up and no signal present, adjust the ¼-turn pot on the SC-50 until the COS LED on the SC-50 extinguishes, then go just a smidge farther. This should be a good starting point until you're ready to fine-tune with a service monitor during audio level alignment.

## 7330 Configuration

Now you'll need to configure a few jumpers inside the 7330. The locations of these jumpers are highlighted on the following page. It should be noted that my DR-1X is installed to Port 2 of my 7330. These instructions are written for Port 2, so you'll need to make the appropriate changes if you are on a different port.

### Logic Input Pullup

- Remove the J4 IN-1 jumper (to avoid biasing the DR-1X internal PTT)

### Radio Interface J11 jumpers (if you are using Port 2)

- De-emphasis
- High Output
- Delay
- Set the delay pot to about 1/3 clockwise and fine-tune from there during audio setup.

### CTCSS/Logic Out jumper

- Select CTCSS (The 7330 generates the CTCSS signal)

### COR/CTCSS Inversion jumpers


- COR and CTCSS inversion jumpers should both be installed for this port. My configuration has the pull-up jumper installed for CTCSS but not COR.

## 7330 DR-1X Script Kit

The always up-to-date script kit is at [http://ks0lnk.net/documents/DR1X\\_script\\_kit.txt](http://ks0lnk.net/documents/DR1X_script_kit.txt). The script kit requires S-Com version 3.4.1 or later. If you have an older version, you will have to upgrade to this version for this script kit to work. Cut and paste the script kit into Notepad and replace (MPW) with your actual Master Password, re-name the (MAC1) through (MAC5) macros, then cut and paste the script immediately below the line that sets your master password. This script also requires Macro-only password decoding to be enabled, and assumes you have no macro named D999 which is used to exit a true Boolean with no action taken.

The script kit uses the following resources:

- User softswitches 293 through 296
- User timers 08, 09, and 11
- Logic input 1 (DR-1X internal PTT sense)
- Logic Output 1 (AMS/FM Mode Select), Logic Output 2 (DC Power relay)
- Logic Output 8 (only an indicator LED for Digital Call Active)
- Macros D700 through D719, plus four more for Master PTT disable and Master AMS disable.
- Your custom ID's hang timers, courtesy tone, CTCSS configuration, etc.

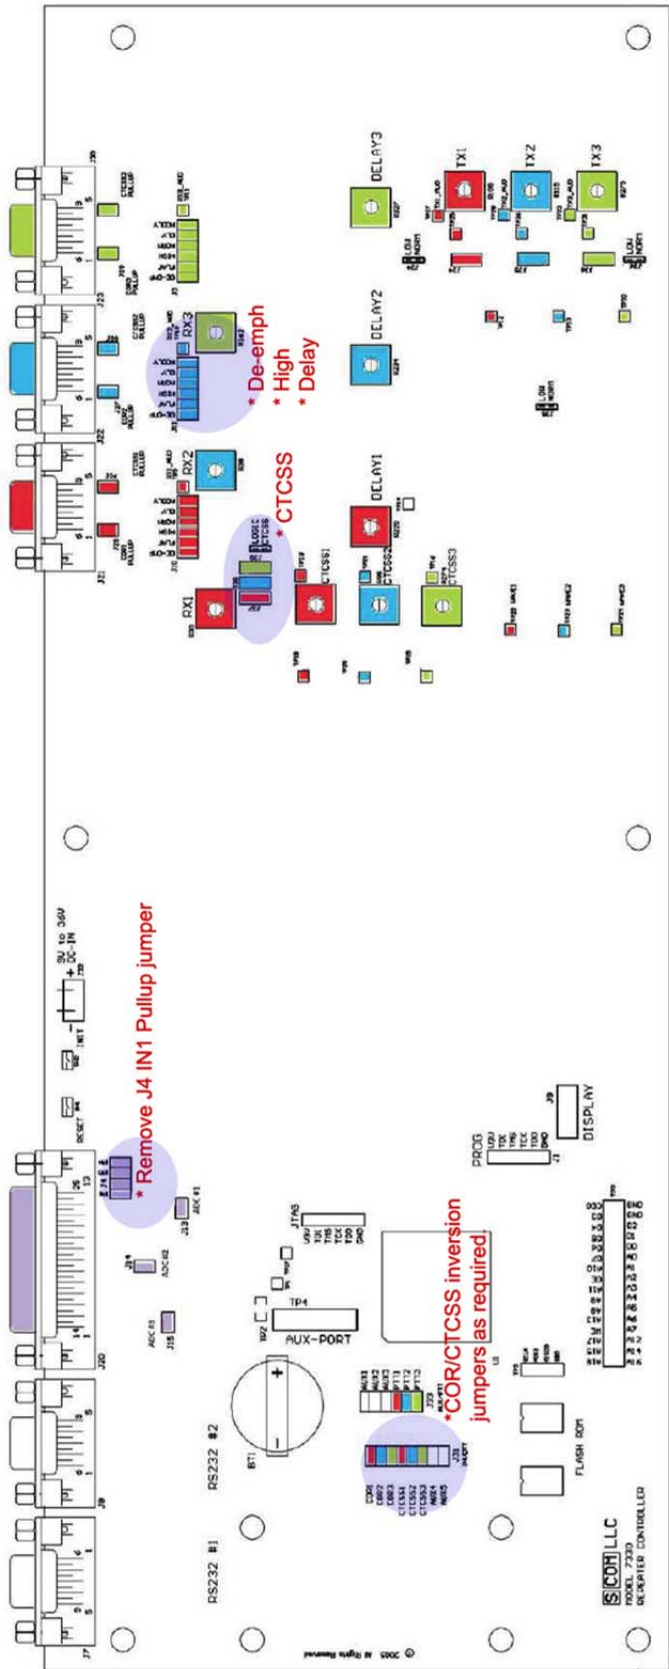




## 7330 Audio Level Alignment


With the DR-1X transmitter terminated into a 50 ohm load, or a service monitor, inject an RF carrier modulated with a 1 kHz tone deviated at 3 kHz with the proper CTCSS tone into the receiver. Adjust the RX2 pot until you get 355mV AC at the test point. With an unmodulated carrier, adjust the CTCSS encoder pot for the proper level (about 650 Hz deviation) and then set the TX Audio pot for 1:1 deviation at 3 kHz input deviation.

If you don't have a service monitor, get one. But until then, you can get close by using a DTMF key on your handheld to set the RX Audio level near 355mV AC at the test point, and then setting the CTCSS level about 1/3 clockwise, and the TX Audio pot so that the repeated audio sounds the same level as the audio on the input frequency.

Enjoy!

## Photo of SC-50 Mounting Location

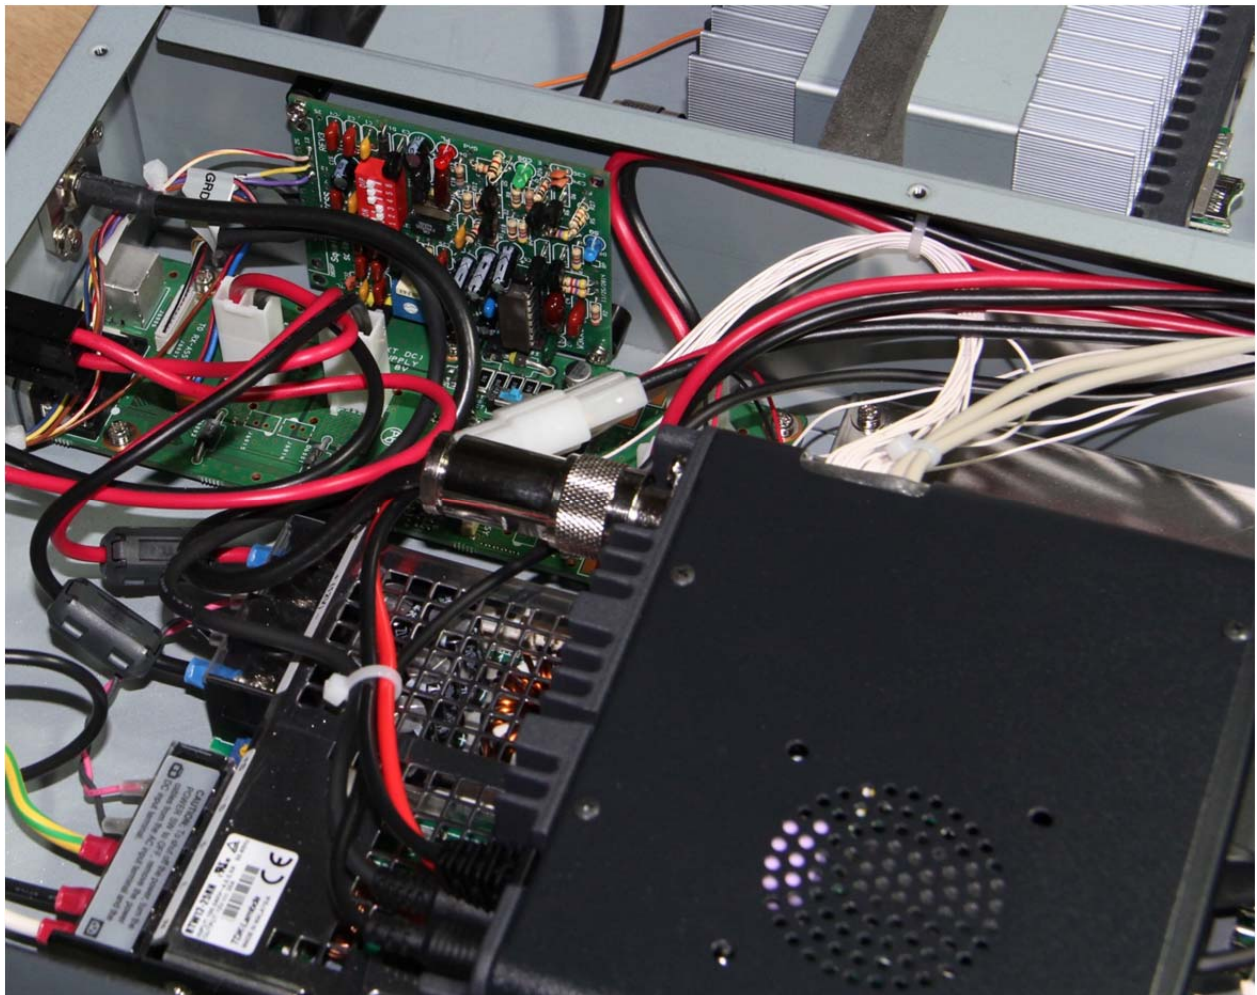

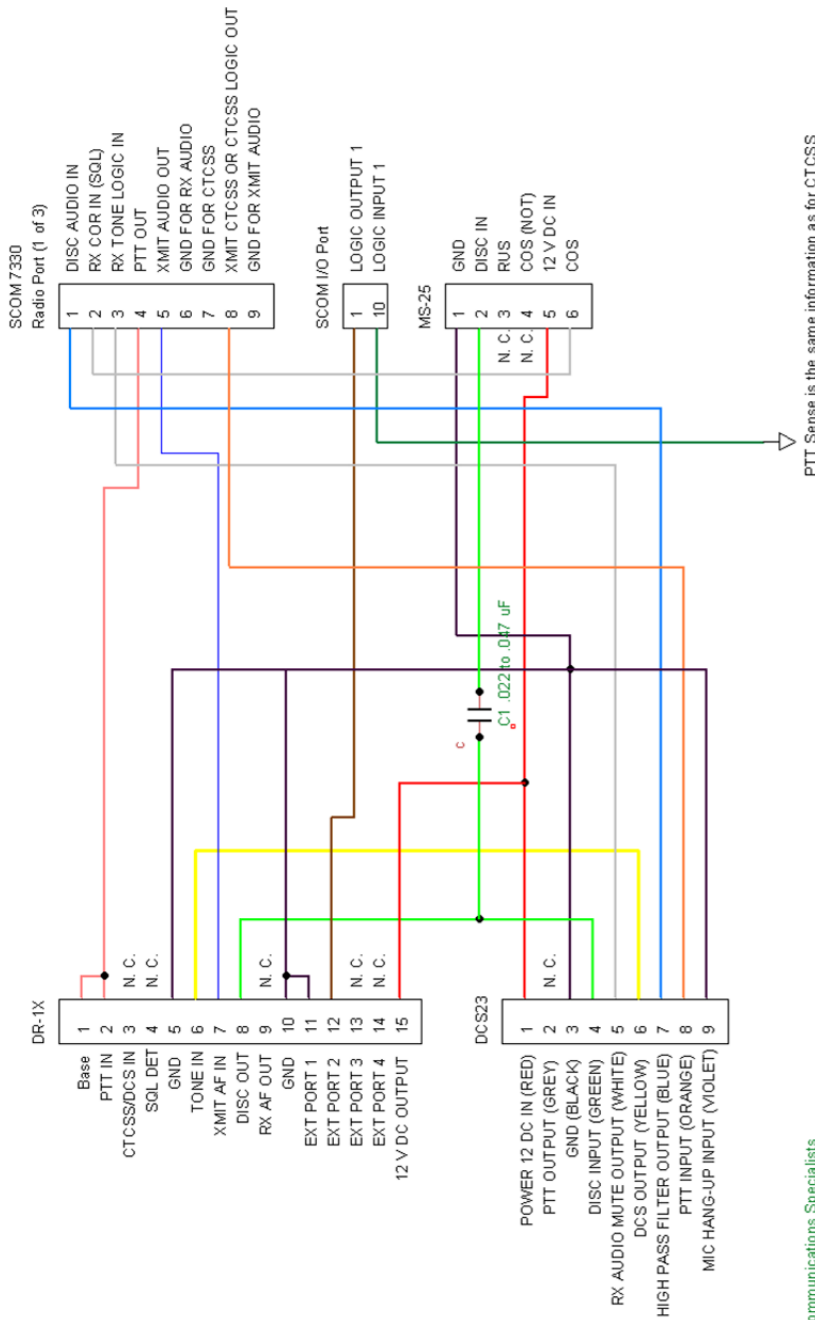

PTT Sense is the same information as for CTCSS

- NOTES:
- DC-S23 is from Communications Specialists
  - MS-25 Squelch Board from Kevin Custer W3K4KC
  - [kuggie@kuggie.com](mailto:kuggie@kuggie.com)
  - <http://www.repeater-builder.com/w3k4kc/products/squelch/ms25.html>
  - C1 Added to decouple the DC on the discriminator line and to reduce the loading effect of the
  - DK-Ohm variable resistor on the MS-25 Squelch Board
  - CTCSS/Logic jumper to LOGIC to enable DCS out during TX

Title DR-1X to S-COM7330 Controller using DCS	
Author Stephen Strom N4GXX A work based on the work by Justin Reed NV8Q	
File	D:\S-Com7330 to DR-1X.dsn
Revision	Date July 30, 2015
1.0	1 of 1

## Revisions:

5/29/2015: Corrected typo referring to Logic Output 4 (should be 8).

8/1/2015: Added MS-25 and DCS23 wiring diagram to page 10.

8/7/2015: Updated SC-50 configuration on page 4. Moving SJ3 to SJ4 allows the discriminator audio to pass to the 7330 ungated. This allows “stealth” DTMF commands to be sent without CTCSS. If you don’t need this, SJ3 will work fine.

12/10/2015: Script kit typo corrected thanks to WA1JHK.

1/1/2015: SC-50 Revision 4 includes improvements and adds SJ5 which connects discriminator audio to the input of the RX high pass filter. This eliminates the need for pins 2 & 3 to be jumped on the DB-25 connector of the SC-50.

## Known Issues:

6/22/2015: An extended conversation on analog (without letting the transmitter drop) will cause the PTT Watchdog script to reset the DR-1X (if you have an AC or DC power interrupt relay installed). A longer watchdog timer and shorter dropout timer will help.

## Notes:

6/22/2015: New version of the SC-50 board does not require a wire jumper across pins 2 and 3, as a shunt has been added on the board.

12/10/2015: The PTT watchdog timer may not be necessary with DR-1X firmware 1.00b or later, as we’ve not seen a “stuck on air” event since the upgrade.

1/21/2015: DR-1X firmware 1.00m and DSP 4.11 was installed on the test bed repeater. The new DSP is an amazing improvement in weak signal performance.